



David Round & Son, Inc.
Ruger Division
32405 Aurora Road
Cleveland, OH 44139
Phone: 440-248-4700
Fax: 440-248-8544
info@davidround.com
www.rugerindustries.com

HYDRAULIC

MORE REACH

MORE HEIGHT


FULL POWER

FP4000R

- 4000 lb. Capacity
- Operator has good visibility for safe operation
- Counterbalanced with no legs out front

OPTIONAL ACCESSORIES

- Hour Meter
- Remote Control Pendant
- Wireless Remote Control
- 24 V. Industrial Quick-Change Battery System (add 6" to overall length)
- Power Hoist
- Power In/Out Boom
- Sealed Maintenance Free Battery

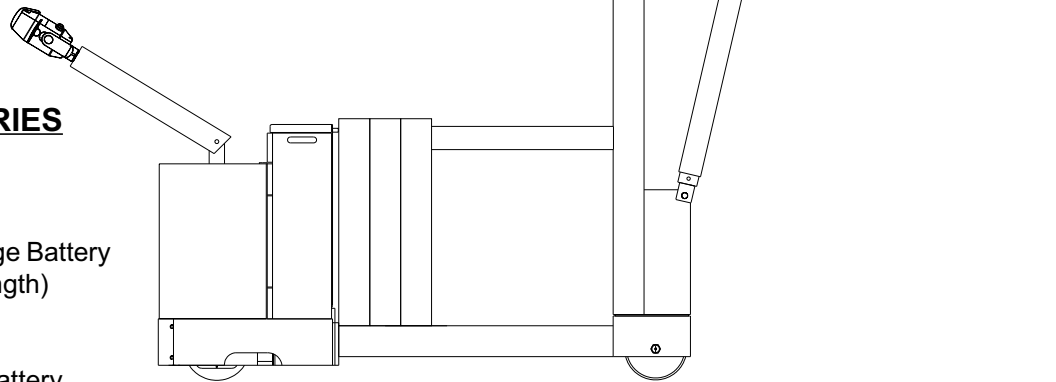

STANDARD FEATURES

- Meets Ruger's engineering standards of 150% structural overload of maximum rated capacity
- Built-in hydraulic overload relief valve
- Pressure-compensated flow valve permits pinpoint control while lifting heavy or light loads
- Polyurethane drive wheel and load wheels
- Manual extension boom for more reach and height
- Infinity Variable Speed Control
- Solid State Circuitry
- 24 volt, 225 amp/hr batteries and 25 amp charger
- Dynamic brake
- Key lock and battery condition indicator

Prices, Specifications, and Options are subject to Change Without Notice.

All Ruger products are shipped F.O.B. Solon, Ohio 44139
Unit Ships-NMFC #118900 Sub 6 - Class 85
Shipping Wt. 4400 lbs.
FAX: 440-248-8544 Email: info@davidround.com

The FP4000R allows the operator to move in tight quarters with a small turn radius. Tested and exceeds ANSI/ASME B56.7 standards. Meets ANSI Z.535



David Round & Son, Inc.
 Ruger Division
 32405 Aurora Road
 Cleveland, OH 44139
 Phone: 440-248-4700
 Fax: 440-248-8544
 info@davidround.com
 www.rugerindustries.com

VERSATILE

COMPACT


AFFORDABLE

DEPENDABLE

MODEL: FP4000R

Shown with optional power boom. (Part# 211961)

Model	FP4000R
Max. Capacity	4000 lbs
Overall Base Length	84"
Overall Width	34"
Overall Height std.	80"
Overall Height w/Power Boom	88-3/4"
Boom Reach Retracted	31"
Boom Reach Extended	72"
Boom Height (lowest position)	11"
Boom Height (highest position)	112"
Wheel Diameter-Load Wheels	8"
Wheel Diameter-Drive Wheel	9-7/8"

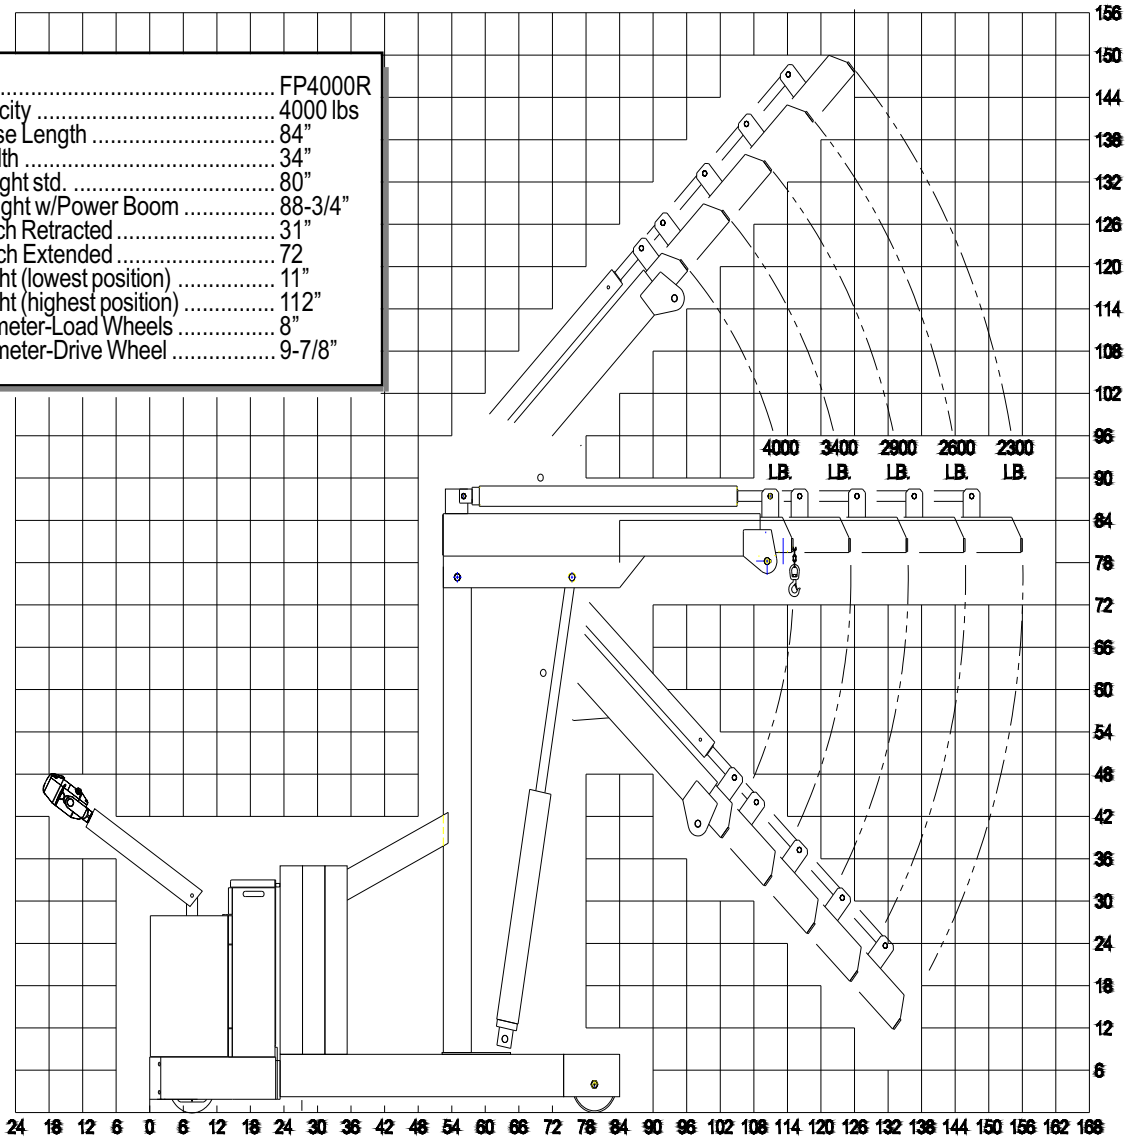

NOTE: Ruger can modify any standard dimensions to meet specific customer needs.